




emotoare

200/3

**Three phase-2poles-3000RPM-50HZ
230/400 Voltage**

Mechanical Features			Electric Features		
General			General		
Working moment	3.72	kg.cm	Nominal voltage	Δ:230V	Y:400V
Unbalance	1.86	kg.cm	Input power	0.18KW	
Force	189	kg	Current A max	Δ:0.61A	Y:0.35A
Bearing			Power factor	0.78	
TYPE(C&U)	6302 2Z		La/in	3.3	
	100%	5239	Certification		
Life(h)	80%	10358	ETL CLASS II DIV.II	T4	
	50%	42516	GROUP F G TENV NEMA 4		
Bearing Grease			ATEX II 3D Ex tD A22 T100°		
Lube Schedule			IP66		
Lube replacement			Amb Temp. (-20°~+40°)		
Grease Type					

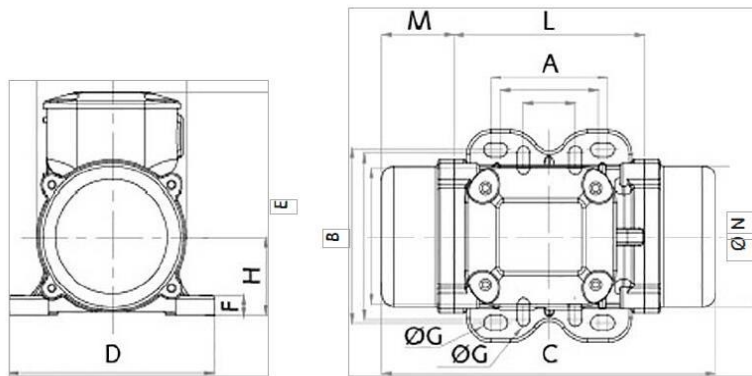

A	62-74
B	106
C	231
M	54
G	9
Holes	4
D	131
E	159
F	15
H	64
I	121
L	123
N	112

Clamping torque(Nm) **23**

weight	Screw	washer	Cable type	Cable Glande
6.3	M8	8.4X16	4GX2.5	M20X1.5